


AEGIS RUBBER ENGINEERING LTD

Bolney Grange Business Park, Stairbridge Lane
Haywards Heath, West Sussex, RH17 5PA
Tel. + 44 (0) 1 444 871 116 Fax. + 44 (0) 1 444 248 327


Type BG – UD Pinned bush – Sheet 1 of 1



Type 1: Grooved Pin

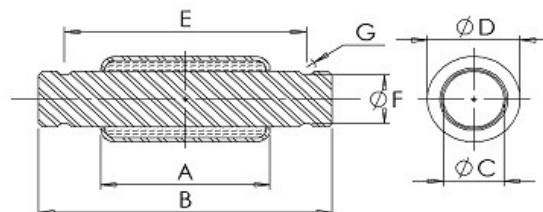

Type 2: Trunnion Pin

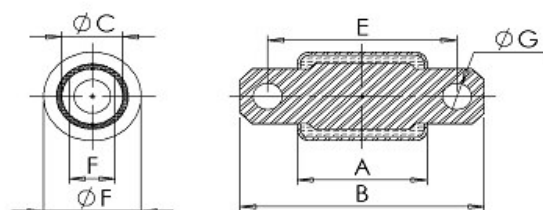

Applications

- Vehicle suspension
- Mechanical linkages
- Bespoke

Description

BG type bushes consist of rubber bonded to an pin and force-fitted into an outer sleeve. Similar to the BC series, the outer metals are turned over to increase radial and axial load bearing capability.

As installed, the rubber is pre-stressed to give maximum dynamic strength and durability..

Specifications

Natural Rubber to BS5179:1975

Highest tensile specification achieved for each hardness band. Each band is tighter than allowed by specification.

Tube to: BS6323: Part 4, DIN2393 / DIN1629

Bar to: BS970: Part 1:1983

Standard finish – Phosphated outer

Tolerances and load-deflection data are available on request

For our current product range, bore diameter ØD ranges from Ø53mm to Ø64mm.

Contact us for more details of our current product range or a quotation for a new product. We can advise price breaks at 20, 50, 100, 500 & 1000 off. info@aegis-rubber-eng.co.uk